





A

内孔车刀系列
Boring bar holder

S



SCLCR/L SCLPR/L

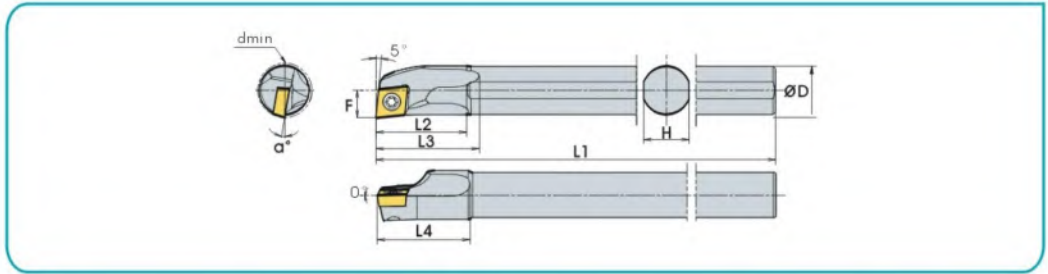

A
内孔车刀系列
Boring bar holder



型号 Designation	库存 Stock		尺寸 Size								刀片 Inserts	标准 刀尖R Std Corner-R(r)	冷却液孔 Coolant Hole	螺钉 Screw	扳手 Wrench				
	R	L	dmin	ΦD	H	L1	L2	L3	L4	F						α°			
A08K-SCLCR/L06-AV			10	8	7	125	16	20	17	5	14°	CC□□0602□□	0.4	有	M2.5X5	T-8			
A10K-SCLCR/L06-AV			12	10	9	125	20	25	21	6	12°				M2.5X6				
A12M-SCLCR/L06-AV			14	12	11	150	24	30	25	7	10°				CC□□09T3□□	0.4	无	M3.5X9	T-15
A16Q-SCLCR/L09-AV			18	16	15	180	30	34	31	9	10°							M3.5X9	T-15
A20R-SCLCR/L09-AV			22	20	19	200	36	49	37	11	8°							M3.5X9	T-15
A25S-SCLCR/L09-AV			27	25	24	250	46	55	46	13.5	6°				M3.5X9	T-15			
S08K-SCLCR/L06-AV	●		10	8	7	125	16	20	17	5	14°	CC□□0602□□	0.4	无	M2.5X5	T-8			
S10K-SCLCR/L06-AV	●		12	10	9	125	20	25	21	6	12°				M2.5X6				
S12M-SCLCR/L06-AV	●		14	12	11	150	24	30	25	7	10°				CC□□09T3□□	0.4	无	M3.5X9	T-15
S16Q-SCLCR/L09-AV	●		18	16	15	180	30	34	31	9	10°							M3.5X9	T-15
S20R-SCLCR/L09-AV	●		22	20	19	200	36	49	37	11	8°							M3.5X9	T-15
S25S-SCLCR/L09-AV	●		27	25	24	250	46	55	46	13.5	6°				M3.5X9	T-15			

型号 Designation	库存 Stock		尺寸 Size								刀片 Inserts	标准 刀尖R Std Corner-R(r)	冷却液孔 Coolant Hole	螺钉 Screw	扳手 Wrench				
	R	L	dmin	ΦD	H	L1	L2	L3	L4	F						α°			
A10K-SCLPR/L08-AV			12	10	9	125	20	25	20	6	5°	CP□□0803□□	0.4	有	M3X6	T-10			
A12M-SCLPR/L08-AV			14	12	11	150	24	29	24	7	4°				CP□□0903□□	0.4	无	M3X9	T-15
A12M-SCLPR/L09-AV			16	12	11	150	24	31	24	8	4°							M3X9	T-15
A16Q-SCLPR/L09-AV			18	16	15	180	30	37	30	9	3.5°							M3X9	T-15
A20R-SCLPR/L09-AV			22	20	19	200	36	47	37	11	2°				CP□□0903□□	0.4	无	M3X9	T-15
A25S-SCLPR/L09-AV			27	25	24	150	46	55	46	13.5	0°							M3X9	T-15
S10K-SCLPR/L08-AV			12	10	9	125	20	55	20	6	5°	CP□□0803□□	0.4	无				M3X6	T-10
S12M-SCLPR/L08-AV			14	12	11	150	24	29	24	7	4°				CP□□0903□□	0.4	无	M3X9	T-15
S16Q-SCLPR/L09-AV			18	16	15	180	30	37	30	9	3.5°							M3X9	T-15
S20R-SCLPR/L09-AV			22	20	19	200	36	47	37	11	2°							M3X9	T-15
S25S-SCLPR/L09-AV			27	25	24	250	46	55	46	13.5	0°				M3X9	T-15			



SDQCR/L



A
内孔车刀系列
Boring bar holder

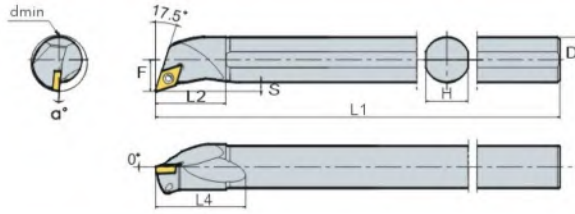

型号 Designation	库存 Stock		尺寸 Size									刀片 Inserts	标准刀尖R Std corner R(r)	冷却液孔 Coolant Hole	螺钉 Screw	扳手 Wrench
	R	L	dmin	ΦD	H	L1	L2	L3	L4	F	α°					
A10K-SDQCR/L07AV			13	10	9	125	19	2.1	20	7.5	10°	DC□□0702□□	0.4	有	M2.5X6	T-8
A12M-SDQCR/L07AV			16	12	11	150	22	2.6	24	9.25	8°					
A16Q-SDQCR/L11AV			20	16	15	180	25	2.6	30	11.3	6°	DC□□11T3□□	0.4	有	M3.5X9	T-15
A20R-SDQCR/L11AV			25	20	19	200	31	3.7	37	14.4	5°					
A25S-SDQCR/L11AV			30	25	24	250	38	3.7	46	16.9	4°					
S10K-SDQCR/L07AV	●		13	10	9	125	19	2.1	20	7.5	10°	DC□□0702□□	0.4	无	M2.5X6	T-8
S12M-SDQCR/L07AV	●		16	12	11	150	22	2.6	24	9.25	8°					
S16Q-SDQCR/L11AV	●		20	16	15	180	25	2.6	30	11.3	6°	DC□□11T3□□	0.4	无	M3.5X9	T-15
S20R-SDQCR/L11AV	●		25	20	19	200	31	3.7	37	14.4	5°					
S25S-SDQCR/L11AV	●		30	25	24	250	38	3.7	46	16.9	4°					



SDUCR/L

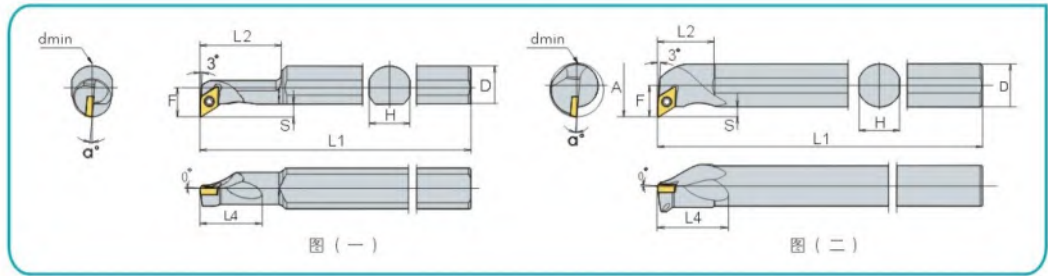

A
内孔车刀系列
Boring bar holder

型号 Designation	库存 Stock		尺寸 Size								刀片 Inserts	标准 刀尖R Std.comer(R,r)	冷却液孔 Coolant Hole	形状 Shape	螺钉 Screw	扳手 Wrench	
	R	L	dmin	ΦD	H	L1	L2	L3	L4	F							α°
A16Q-SDUCR/L07-14AV	●		14	16	15	180	28	4.4	23	10.8		0.4	有	图1	M2.5X6	T-8	
A20R-SDUCR/L11-20AV	●		20	20	19	200	48	6.1	30	15.6							M3.5X9
A10K-SDUCR/L07AV	●		14	10	9	125	19	3.3	20	8.7					图2	M2.5X6	T-8
A12M-SDUCR/L07AV	●		16	12	11	150	21	3.3	24	9.7	5°						
A16Q-SDUCR/L07AV	●		20	16	15	180	21	3.3	26	11.7							
A16Q-SDUCR/L11AV			23	16	15	180	21	6.1	31	14.5							
A20R-SDUCR/L11AV			27	20	19	200	23	6.1	36	16.5						M3.5X9	T-15
A25S-SDUCR/L11AV			32	25	24	250	24	6.1	39	19							
S16Q-SDUCR/L07-14AV			14	16	15	180	28	4.4	23	10.8		0.4	无	图1	M2.5X6	T-8	
S20R-SDUCR/L11-20AV			20	20	19	200	48	6.1	30	15.6							M3.5X9
S10K-SDUCR/L07AV	●		14	10	9	125	19	3.3	20	8.7					图2	M2.5X6	T-8
S12M-SDUCR/L07AV	●		16	12	11	150	21	3.3	24	9.7	5°						
S16Q-SDUCR/L07AV	●		20	16	15	180	21	3.3	26	11.7							
S16Q-SDUCR/L11AV	●		23	16	15	180	21	6.1	31	14.4							
S20R-SDUCR/L11AV	●		27	20	19	200	23	6.1	36	16.5						M3.5X9	T-15
S25S-SDUCR/L11AV	●		32	25	24	250	24	6.1	39	19							



SDZCR/L

A 内孔车刀系列
Boring bar holder

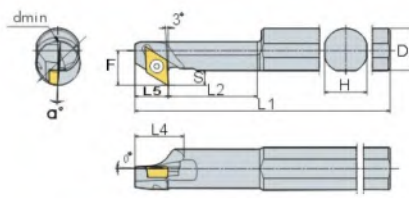



图 (一)



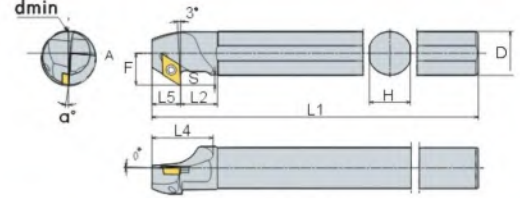


图 (二)

型号 Designation	库存 Stock		尺寸 Size										刀片 Inserts	标准刀尖R Std corner-R(r)	冷却液孔 Coolant Hole	形状 Shape	螺钉 Screw	扳手 Wrench		
	R	L	dmin	ΦD	H	L1	L2	L4	L5	F	S	α°								
A16Q-SDZCR/L 07-14AV			14	16	15	180	30	17	10	10.8	4.4	5°	DC□□0702□□	0.4	有	图1	M2.5X6	T8		
A20R-SDZCR/L 11-20AV			20	20	19	200	40	24	15	15.6	6.1		DC□□11T3□□				M3.5X9	T15		
A10K-SDZCR/L 07AV			14	10	9	140	14	16	9.5	8.7	3.3		DC□□0702□□			0.4	有	图2	M2.5X6	T8
A12M-SDZCR/L 07AV			16	12	11	150	14	20	10.5	9.7	3.3									
A16Q-SDZCR/L 07AV			20	16	15	180	14	22	10.5	11.7	3.3		DC□□11T3□□			0.4	有	图2	M3.5X9	T-15
A16Q-SDZCR/L 11AV			23	16	15	180	25	22	15	14.5	6.1									
A20R-SDZCR/L 11AV			27	20	19	200	15	25	15	16.5	6.1		DC□□11T3□□			0.4	有	图1	M2.5X6	T8
A25S-SDZCR/L 11AV			32	25	24	250	15	26	15	19	6.1									
S16Q-SDZCR/L07-14AV			14	16	15	180	30	17	10	10.8	4.4	5°	DC□□0702□□	0.4	有	图1	M2.5X6	T8		
S20R-SDZC R/L11-20AV			20	20	19	200	40	24	15	15.6	6.1		DC□□11T3□□				M3.5X9	T15		
S10K-SDZC R/L 07AV			14	10	9	140	14	16	9.5	8.7	3.3		DC□□0702□□			0.4	有	图2	M2.5X6	T8
S12M-SDZCR/L 07AV			16	12	11	150	14	20	10.5	9.7	3.3									
S16Q-SDZCR/L07AV			20	16	15	180	14	22	10.5	11.7	3.3		DC□□11T3□□			0.4	有	图2	M3.5X9	T-15
S16Q-SDZC R/L 11AV			23	16	15	180	15	22	15	14.5	6.1									
S20R-SDZCR/L 11AV			27	20	19	200	15	25	15	16.5	6.1		DC□□11T3□□			0.4	有	图1	M2.5X6	T8
S25S-SDZCR/L 11AV			32	25	24	250	15	26	15	19	6.1									

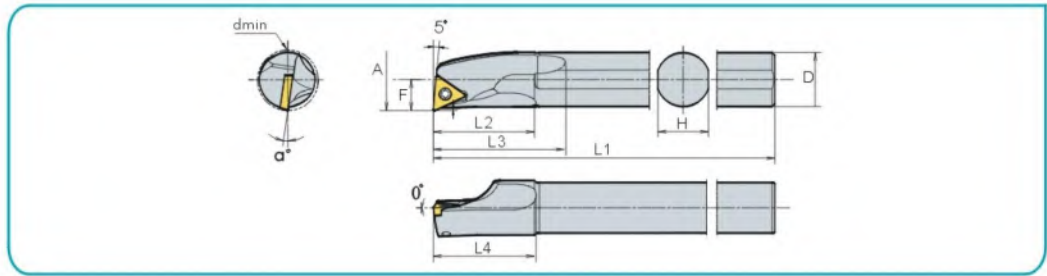

STUCR/L





A 内孔车刀系列
Boring bar holder

型号 Designation	库存 Stock		尺寸 Size								刀片 Inserts	标准 刀尖R Std corner R	冷却液孔 Coolant Hole	螺钉 Screw	扳手 Wrench	
	R	L	dmin	ΦD	H	L1	L2	L3	L4	F						α°
A08K-STUCR/L09AV			10	8	7	120	16	22	16	5	14°	TC□□0902□□	0.4	有	M2.2X5	T-6
A10K-STUCR/L09AV			12	10	9	140	20	26	20	6.2	12°					
A10K-STUCR/L11AV			12	10	9	140	20	26	20	6.2	12°	TC□□1103□□	0.4	有	M2.5X6	T-8
A12M-STUCR/L11AV			14	12	11	150	24	30	25	7.2	10°					
A16Q-STUCR/L11AV			18	16	15	180	30	39	31	9.2	8°					
A20R-STUCR/L11AV			22	20	19	200	36	44	36	11.2	6°					
S08K-STUCR/L09AV	●		10	8	7	120	16	22	16	5	14°	TC□□0902□□	0.4	无	M2.2X5	T-6
S10K-STUCR/L09AV	●		12	10	9	140	20	26	20	6.2	12°					
S10K-STUCR/L11AV	●		12	10	9	140	20	26	20	6.2	12°	TC□□1103□□	0.4	无	M2.5X6	T-8
S12M-STUCR/L11AV	●		14	12	11	150	24	30	25	7.2	10°					
S16Q-STUCR/L11AV	●		18	16	15	180	30	39	31	9.2	8°					
S20R-STUCR/L11AV	●		22	20	19	200	36	44	36	11.2	6°					



STUPR/L



A
内孔车刀系列
Boring bar holder

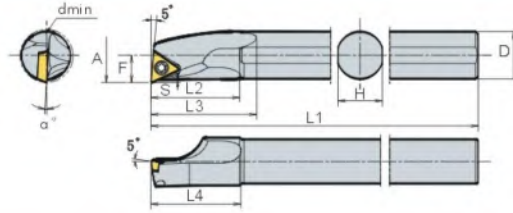

型号 Designation	库存 Stock		尺寸 Size									刀片 Inserts	标准 刀尖R Std corner-R(r)	冷却液孔 Coolant Hole	螺钉 Screw	扳手 Wrench				
	R	L	dmin	ΦD	H	L1	L2	L3	L4	F	α°									
A08K-STUPR/L09AV			10	8	7	125	16	22	16	5	10°	TP□□0902□□	0.4	有	M2.5X5	T-8				
A10K-STUPR/L09AV			12	10	9	125	20	25	20	6.2	8°									
A10K-STUPR/L11AV			12	10	9	125	20	25	20	6	10°	TP□□1103□□			0.4	有	M3.0X6	T-8		
A12M-STUPR/L11AV			14	12	11	150	24	30	24	7.2	7°									
A16Q-STUPR/L11AV			18	16	15	180	30	36	30	9.2	3.5°	TP□□1603□□					0.4	有	M3.5X9	T-15
A20R-STUPR/L11AV			22	20	19	200	36	46	37	11.2	2°									
A25S-STUPR/L16AV			27	25	24	250	46	55	46	13.7	0°	TP□□1603□□	0.4	无					M2.5X5	T-8
S08K-STUPR/L09AV	●		10	8	7	125	16	22	16	5	10°	TP□□0902□□								
S10K-STUPR/L09AV	●		12	10	9	125	20	25	20	6.2	8°									
S10K-STUPR/L11AV	●		12	10	9	125	20	25	20	6	10°	TP□□1103□□			0.4	无			M3.0X6	T-8
S12M-STUPR/L11AV	●		14	12	11	150	24	30	24	7.2	7°									
S16Q-STUPR/L11AV	●		18	16	15	180	30	36	30	9.2		TP□□1603□□					0.4	无	M3.5X9	T-15
S20R-STUPR/L11AV	●		22	20	19	200	36	46	37	11.2	2°									
S25S-STUPR/L16AV			27	25	24	250	46	55	46	13.7	0°	TP□□1603□□	0.4	无					M3.5X9	T-15



SVJP(C)(B)R/L

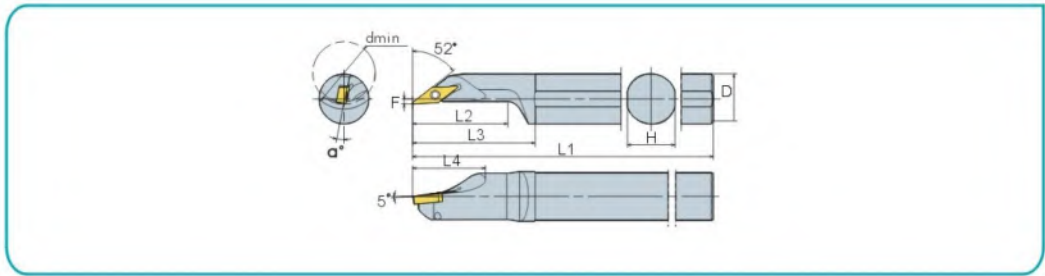



A 内孔车刀系列
Boring bar holder

型号 Designation	库存 Stock		尺寸 Size								刀片 Inserts	标准 刀尖R Std corner R (r)	冷却液孔 Coolant Hole	螺钉 Screw	扳手 Wrench			
	R	L	dmin	ΦD	H	L1	L2	L3	L4	F						α°		
A12M-SVJPR/L 08AV			16	12	11	150	26	33	21	2	5°	VP□□0802□□	0.2	有	T-6	M2.0X5		
A12M-SVJCR/L 08AV			16	12	11	150	26	33	20	2	5°	VC□□0802□□	0.4					
A16Q-SVJCR/L 08AV			20	16	15	180	36	43	22	2	5°	VB□□1103□□			0.4	T-8	M2.5X8	
A20R-SVJBR/L 11AV			25	20	19	200	37.5	48	30	2	5°							
A25S-SVJBR/L 11AV			30	25	24	250	45	58	33	3.5	5°	VB□□1604□□				0.4	T-15	M3.5X9
A32S-SVJBR/L 16AV			40	32	31	250	60	74	45	3.5	8°							
A40S-SVJBR/L 16AV			50	40	39	300	75	91	49	4.5	7°	VC□□1604□□						
S12M-SVJPR/L 08AV			16	12	11	150	26	33	21	2	5°	VP□□0802□□	0.2	无			T-6	M2.0X5
S12M-SVJCR/L 08AV			16	12	11	150	26	33	20	2	5°	VC□□0802□□	0.4					
S16Q-SVJCR/L 08AV			20	16	15	180	36	43	22	2	5°	VB□□1103□□			0.4		T-8	M2.5X8
S20R-SVJBR/L 11AV			25	20	19	200	37.5	48	30	2	5°							
S25S-SVJBR/L 11AV			30	25	24	250	45	58	33	3.5	5°	VB□□1604□□				0.4	T-15	M3.5X9
S32S-SVJBR/L 16AV			40	32	31	250	60	74	45	3.5	8°							
S40S-SVJBR/L 16AV			50	40	39	300	75	91	49	4.5	7°	VC□□1604□□						



SVQBR/L

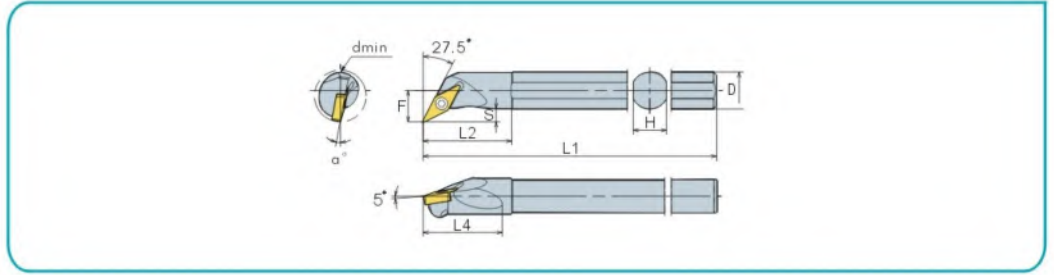



A
内孔车刀系列
Boring bar holder

型号 Designation	库存 Stock		尺寸 Size									刀片 Inserts	标准 刀尖R Std corner-R(r)	冷却液孔 Coolant Hole	螺钉 Screw	扳手 Wrench
	R	L	dmin	ΦD	H	L1	L2	L4	F	S	α°					
A10K-SVQCR/L08AV			14	10	9	125	24	21	8.5	3	8°	VC□□0802□□	0.4	有	M2.0X5	T-6
A12M-SVQBR/L11AV			18	12	11	150	29	26	11	4.5	8°					
A16Q-SVQBR/L11AV			22	16	15	180	35	33	13.5	5	5°	VB□□1103□□			M2.5X8	T-8
A20R-SVQBR/L11AV			26	20	19	200	41	39	15.5	5	5°					
A25S-SVQBR/L16AV			31	25	24	250	51	49	18	5	3°	VB□□1604□□ VC□□1604□□			M3.5X9	T-15
A32S-SVQBR/L16AV			40	32	31	250	54	53	23	6.5	3°					
S10K-SVQCR/L08AV			14	10	9	125	24	21	8.5	3	8°	VC□□0802□□	0.4	无	M2.0X5	T-6
S12M-SVQBR/L11AV			18	12	11	150	29	26	11	4.5	8°					
S16Q-SVQBR/L11AV			22	16	15	180	35	33	13.5	5	5°	VB□□1103□□			M2.5X8	T-8
S20R-SVQBR/L11AV			26	20	19	200	41	39	15.5	5	5°					
S25S-SVQBR/L16AV			31	25	24	250	51	49	18	5	3°	VB□□1604□□ VC□□1604□□			M3.5X9	T-15
S32S-SVQBR/L16AV			40	32	31	250	54	53	23	6.5	3°					



SVUCR/L

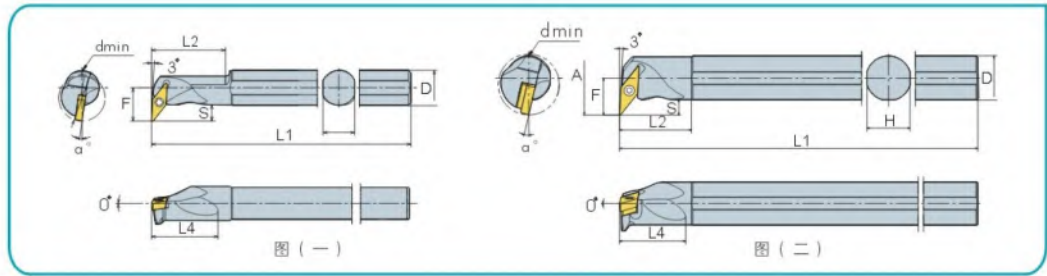



型号 Designation	库存 Stock		尺寸 Size								刀片 Inserts	标准 刀尖R Std corner R (r)	冷却液孔 Coolant Hole	形状 Shape	螺钉 Screw	扳手 Wrench	
	R	L	dmin	ΦD	H	L1	L2	L4	F	S							α°
A12M-SVUCR/L 08AV			16	12	11	150	25.5	32	11.5	5.5	8°	VC□□0802□□	0.4	有	图2	M2.0X5	T-6
A16Q-SVUBR/L 11AV			20	16	15	180	32.5	27	16	8	8°	VB□□1103□□				M2.5X8	T-8
A20R-SVUBR/L 11AV			25	20	19	200	40.5	31	18	8	7°	VB□□1604□□ VC□□1604□□			图1	M3.5X9	T-15
A25S-SVUBR/L 16AV			34	25	24	250	40	37	20.5	8.5	5°				图2		
A32S-SVUBR/L 16AV			40	32	31	250	84	47	28	12	5°						
S12M-SVUCR/L 08AV			16	12	11	150	25.5	32	11.5	5.5	8°	VC□□0802□□			0.4	无	图2
S16Q-SVUBR/L 11AV			20	16	15	180	32.5	27	16	8	8°	VB□□1103□□	M2.5X8	T-8			
S20R-SVUBR/L 11AV			25	20	19	200	40.5	31	18	8	7°	VB□□1604□□ VC□□1604□□	图1	M3.5X9			T-15
S25S-SVUBR/L 16AV			34	25	24	250	40	37	20.5	8.5	5°		图2				
A32S-SVUBR/L 16AV			40	32	31	250	84	47	28	12	5°						

A 内孔车刀系列
Boring bar holder



SVZBR/L



A
内孔车刀系列
Boring bar holder

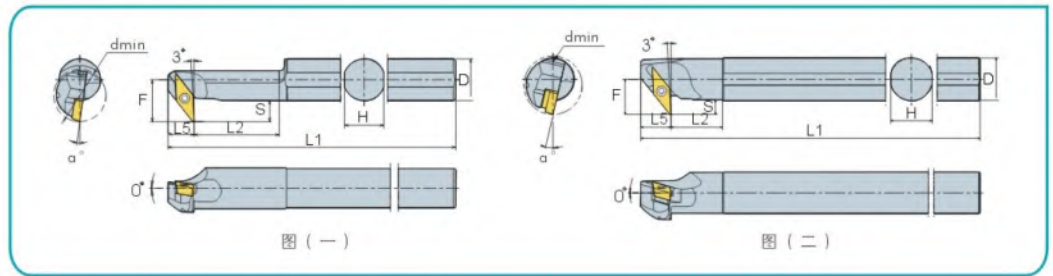

型号 Designation	库存 Stock		尺寸 Size								刀片 Inserts	标准 刀尖R Std corner R(r)	冷却液孔 Coolant Hole	形状 Shape	螺钉 Screw	扳手 Wrench	
	R	L	dmin	ΦD	H	L1	L2	L5	F	S							α°
A12M-SVZCR/L08AV			16	12	11	150	25.5	7.5	11.5	5.5	8°	VC□□0802□□	0.4	有	图2	M2.2X5	T-6
A16Q-SVZBR/L11AV			20	16	15	180	32.5	10	16	8	8°	VB□□1103□□				M2.5X8	T-8
A20R-SVZBR/L11AV			25	20	19	200	40.5	10	18	8	7°	VC□□1604□□ VB□□1604□□			图1	M3.5X9	T-15
A25S-SVZBR/L16AV			34	25	24	250	30	17.5	20.5	8.5	5°						
A32S-SVZBR/L16AV			40	32	31	250	72.5	17.5	28	12	5°			图2			
S12M-SVZCR/L08AV			16	12	11	150	25.5	7.5	11.5	5.5	8°	VC□□0802□□	0.4	无	图2	M2.2X5	T-6
S16Q-SVZBR/L11AV			20	16	15	180	32.5	10	16	8	8°	VB□□1103□□				M2.5X8	T-8
S20R-SVZBR/L11AV			25	20	19	200	40.5	10	18	8	7°	VC□□1604□□ VB□□1604□□			图1	M3.5X9	T-15
S25S-SVZBR/L16AV			34	25	24	250	30	17.5	20.5	8.5	5°						
A32S-SVZBR/L16AV			40	32	31	250	72.5	17.5	28	12	5°						



SWUBR/L

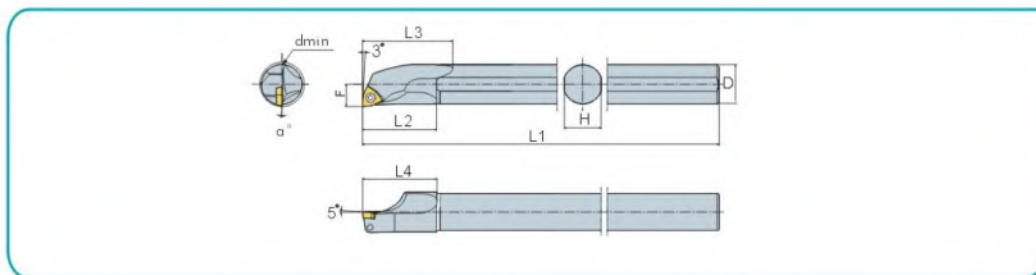

A 内孔车刀系列
Boring bar holder

型号 Designation	库存 Stock		尺寸 Size									刀片 Inserts	标准 刀尖R Std. corner R (r)	冷却液孔 Coolant Hole	螺钉 Screw	扳手 Wrench
	R	L	dmin	ΦD	H	L1	L2	L3	L4	F	α°					
A08K-SWUBR/L08AV			10	8	7	125	16	21	16	5	13°	WB□□0802□□	0.2	有	M2X5	T-6
A10K-SWUBR/L08AV			12	10	9	125	20	25	20	6	10°					
A12M-SWUBR/L11AV			14	12	11	150	24	30	24	7	4°	WP□□1102□□	0.4		M2.5X6	T-8
A16Q-SWUPR/L11AV			18	16	15	180	30	37	30	9	1°					
A16Q-SWUPR/L16AV			18	16	15	180	30	37	30	9	3.5°	WP□□1603□□	0.8		M3.5X9	T-15
A20R-SWUPR/L16AV			22	20	19	200	36	46	37	11	2°					
S08K-SWUBR/L08AV			10	8	7	125	16	21	16	5	13°	WB□□0802□□	0.2	无	M2X5	T-6
S10K-SWUBR/L081AV			12	10	9	125	20	25	20	6	10°					
S12M-SWUBR/L11AV			14	12	11	150	24	30	24	7	4°	WP□□1102□□	0.4		M2.5X6	T-8
S16Q-SWUPR/L11AV			18	16	15	180	30	37	30	9	1°					
S16Q-SWUPR/L16AV			18	16	15	180	30	37	30	9	3.5°	WP□□1603□□	0.8		M3.5X9	T-15
S20R-SWUPR/L16AV			22	20	19	200	36	46	37	11	2°					